



§6 Decision-Making

- decision making and games
 - levels of decision-making
 - modelled knowledge
 - method
- example methods
 - finite state machines
 - flocking algorithms
 - influence maps
- this will not be a comprehensive guide into decision making!

MVC (revisited)

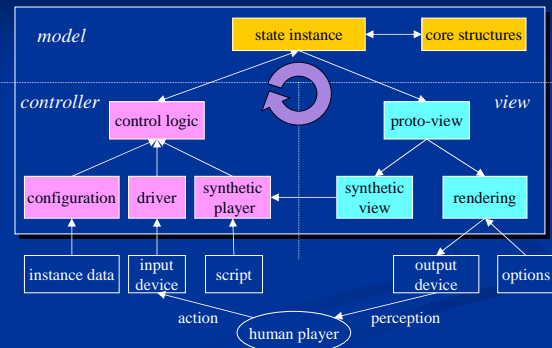

AI system

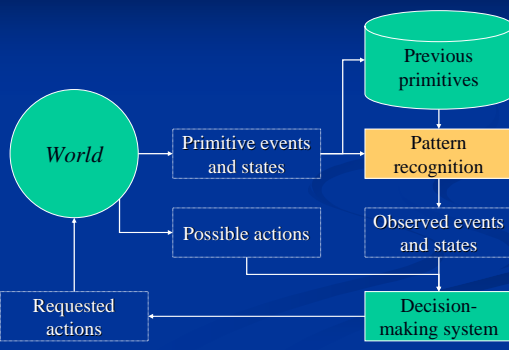

Three perspectives for decision-making in computer games

- level of decision-making
 - strategic, tactical, operational
- use of the modelled knowledge
 - prediction, production
- methods
 - optimization, adaptation

Level of decision-making

- strategic
 - what should be done
- tactical
 - how to actuate it
- operational
 - how to carry it out



Strategic level

- long-term decisions
 - infrequent → can be computed offline or in the background
- large amount of data, which is filtered to bring forth the essentials
 - quantization problem?
- speculative (what-if scenarios)
- the cost of a wrong decision is high

Tactical level

- medium-term decisions
- intermediary between strategic and operational levels
 - follow the plan made on the strategic level
 - convey the feedback from the operational level
- considers a group of entities
 - a selected set of data to be scrutinized
 - co-ordination within the group


Operational level

- short-term decisions
 - reactive, real time response
- concrete and closely connected to the game world
- considers individual entities
- the cost of a wrong decision is relatively low
 - of course not to the entity itself


Use of the modelled knowledge

- time series data
- world = a generator of events and states, which can be labelled with symbols
- prediction
 - what the generator will produce next?
- production
 - simulating the output of the generator
- how to cope with uncertainty?

Prediction

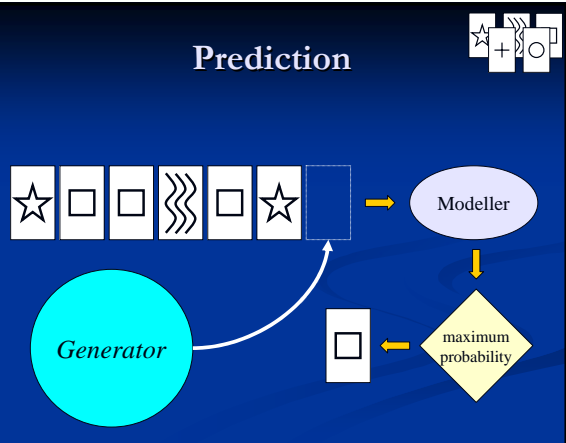

Production

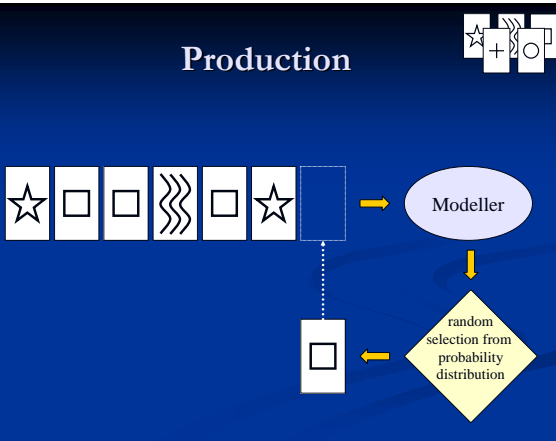

Methods: Optimization

- elements:
 - objective function to be maximized/minimized
 - variables affecting the value of the objective function
 - constraints limiting feasible variable values
- goal: find among the feasible solutions the one that gives an optimum value for the objective function
- time consuming?
 - heuristic rules to guide the search

Methods: Optimization (cont'd)

- hill-climbing
 - how to escape local optima?
- tabu search
- simulated annealing
- genetic algorithms
 - multiple search traces
- swarm algorithms

Methods: Adaptation

- ability to make appropriate responses to changed circumstances → learning
- searches for a function behind given solutions
 - optimization: solution for a given function
 - affecting factors are unknown or dynamic
- pattern recognition

Methods: Adaptation (cont'd)

- neural networks
 - training
 - supervised learning
 - unsupervised learning (e.g., self-organizing maps)
 - execution
- hidden Markov model
 - recurring structures

Soft computing

- L. Zadeh: methodologies that try to solve problems arising from the complexity of the natural world
 - approximation
 - partial truth
 - imprecision
 - uncertainty
- computer games have used 'hard' computing
- as the game worlds get more complex, perhaps soft computing methods would suit better

Soft computing methods

- probabilistic reasoning
 - genetic algorithms
 - Bayesian networks
- artificial neural networks
 - back propagation networks
 - self organizing maps
- fuzzy logic
 - fuzzy sets
 - approximate reasoning

Finite state machine (FSM)

- components:
 - states
 - transitions
 - events
 - actions
- state chart: fully connected directed graph
 - vertices = states
 - edges = transitions

Properties of FSM

1. acceptor
 - does the input sequence fulfil given criteria?
 2. transducer
 - what is the corresponding output sequence for a given input sequence?
 3. computator
 - what is the sequence of actions for a given input sequence?
- these properties are independent!

Mealy and Moore machines

- theoretical categories for FSMs
- Mealy machine
 - actions are in transitions
 - the next action is determined by the current state and the occurring event
 - more compact but harder to comprehend
- Moore machine
 - actions are in states
 - the next action is determined by the next state
- helps to understand and use state machines in UML

Implementation

- design by contract
 - two parties: the supplier and the client
 - formal agreement using interfaces
- FSM software components
 - environment: view to the FSM (client)
 - context: handles the dynamic aspects of the FSM (supplier)
 - structure: maintains the representation of the FSM (supplier)

Noteworthy

- structure is static
 - hard to modify
- reactivity
 - memoryless representation of all possible walks from the initial state
- states are mutually exclusive: one state at a time
 - not for continuous or multivalued values
- combinatorial explosion
 - if the states and events are independent
- risk of total rewriting
 - high cohesion of actions